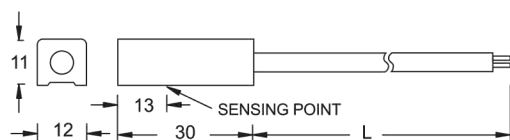


**140°C HIGH TEMP**
**■ DIMENSION**
**■ No M8 Connector Option Available**


Unit:mm

**■ SPECIFICATION**

TYPE	BTC-31R
CONNECT DIAGRAM	
CHARACTERISTICS	
WIRING METHOD	2-Wire Type
SWITCHING LOGIC	SPST, Normally Open
SENSOR TYPE	Reed Switch
OPERATING VOLTAGE	5~240V DC/AC
SWITCHING CURRENT	500 mA max.
CONTACT RATING	10 W max.
CURRENT CONSUMPTION	--
VOLTAGE DROP	0.5 V max.
LEAKAGE CURRENT	--
INDICATOR	None
CABLE	ø3, 2C, Teflon
OPERATING FREQUENCY	200 Hz
MAGNET REQUIREMENT (NOTE 2)	40 Gauss
TEMPERATURE RANGE	-10~140°C
SHOCK (NOTE 3)	30 G
VIBRATION (NOTE 4)	9 G
ENCLOSURE CLASSIFICATION	IEC 529 IP 67
PROTECTION CIRCUIT (NOTE 5)	1

## NOTE:

1. WARNING: Never exceed rating (Watt=Voltage x Amperage). Permanent damage to sensor will occur.
2. Measuring standard target: ø15.5Xø8X5t (Anisotropy rubber magnet)
3. Sin wave / X, Y, Z 3 directions / 3 times each direction / 11 ms each time.
4. Double amplitude 1.5 mm / 10Hz~55Hz~10Hz (Sweep 1 min) / X, Y, Z 3 directions / 1 hour each time.
5. 1=None / 2=Short-circuit / 3=Power Source Reverse polarity / 4=Surge Suppression

**■ MOUNTING CLAMPS**

 PAB Series  
(See Page 2-33)

 PAC Series  
(See Page 2-31)

 PI Series  
(See Page 2-31)
